

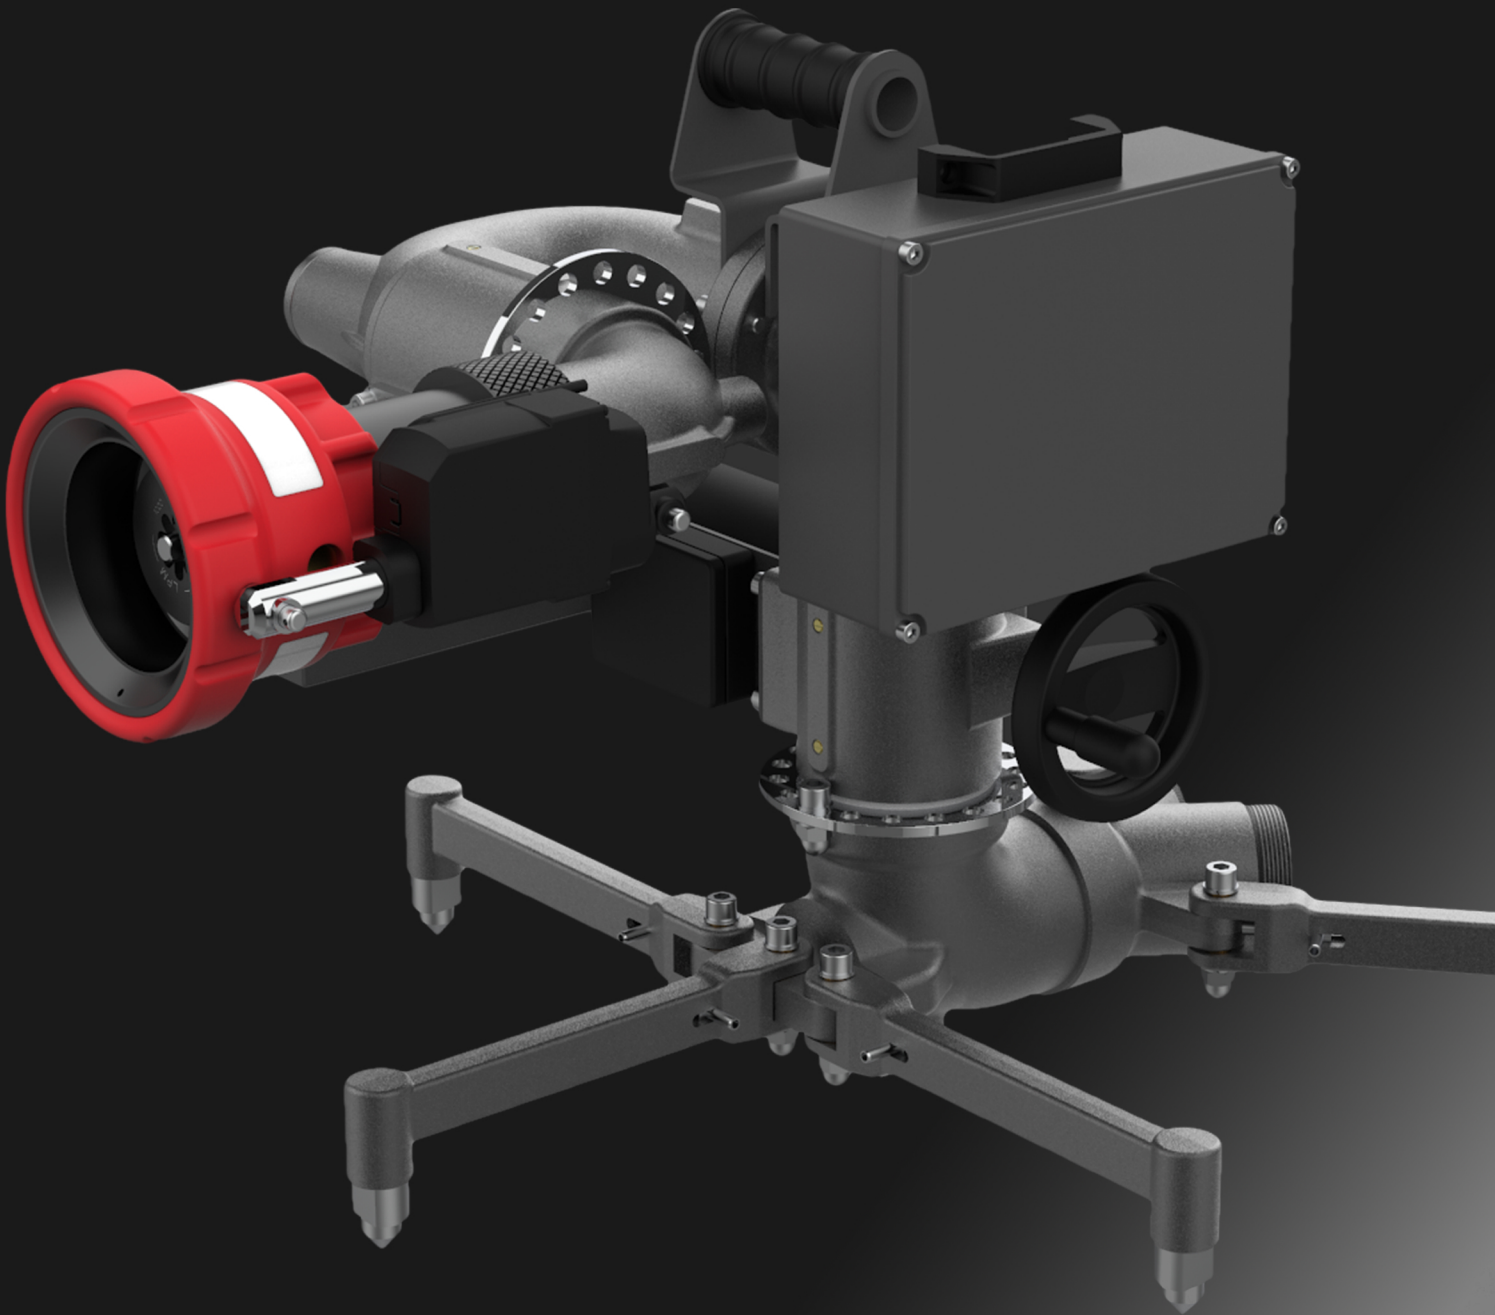
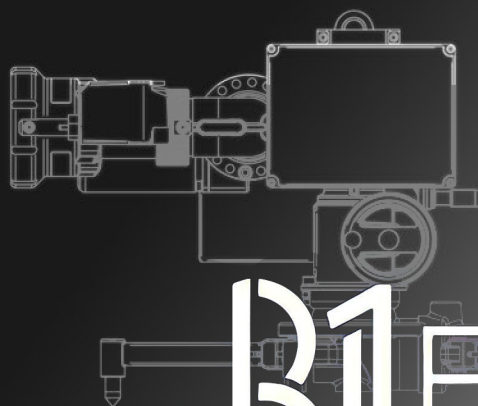
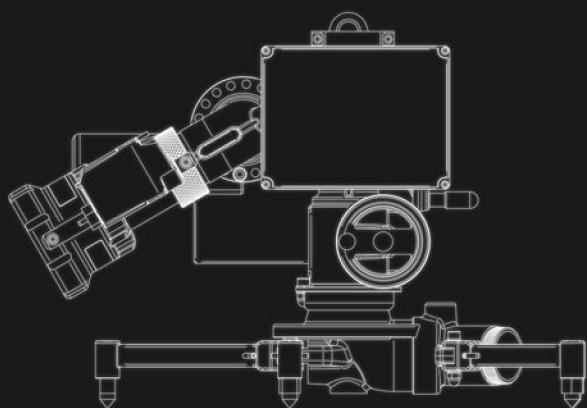



STRATUS-PB

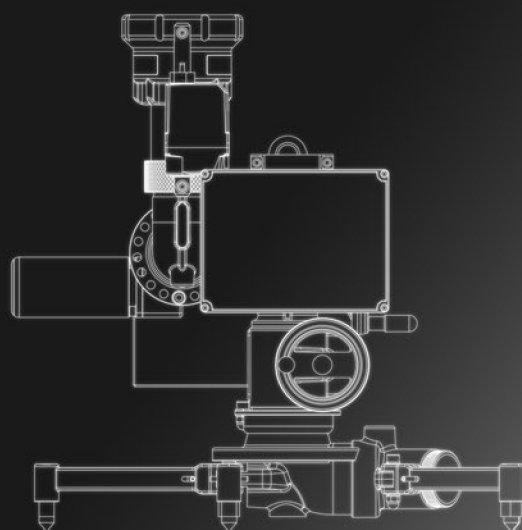

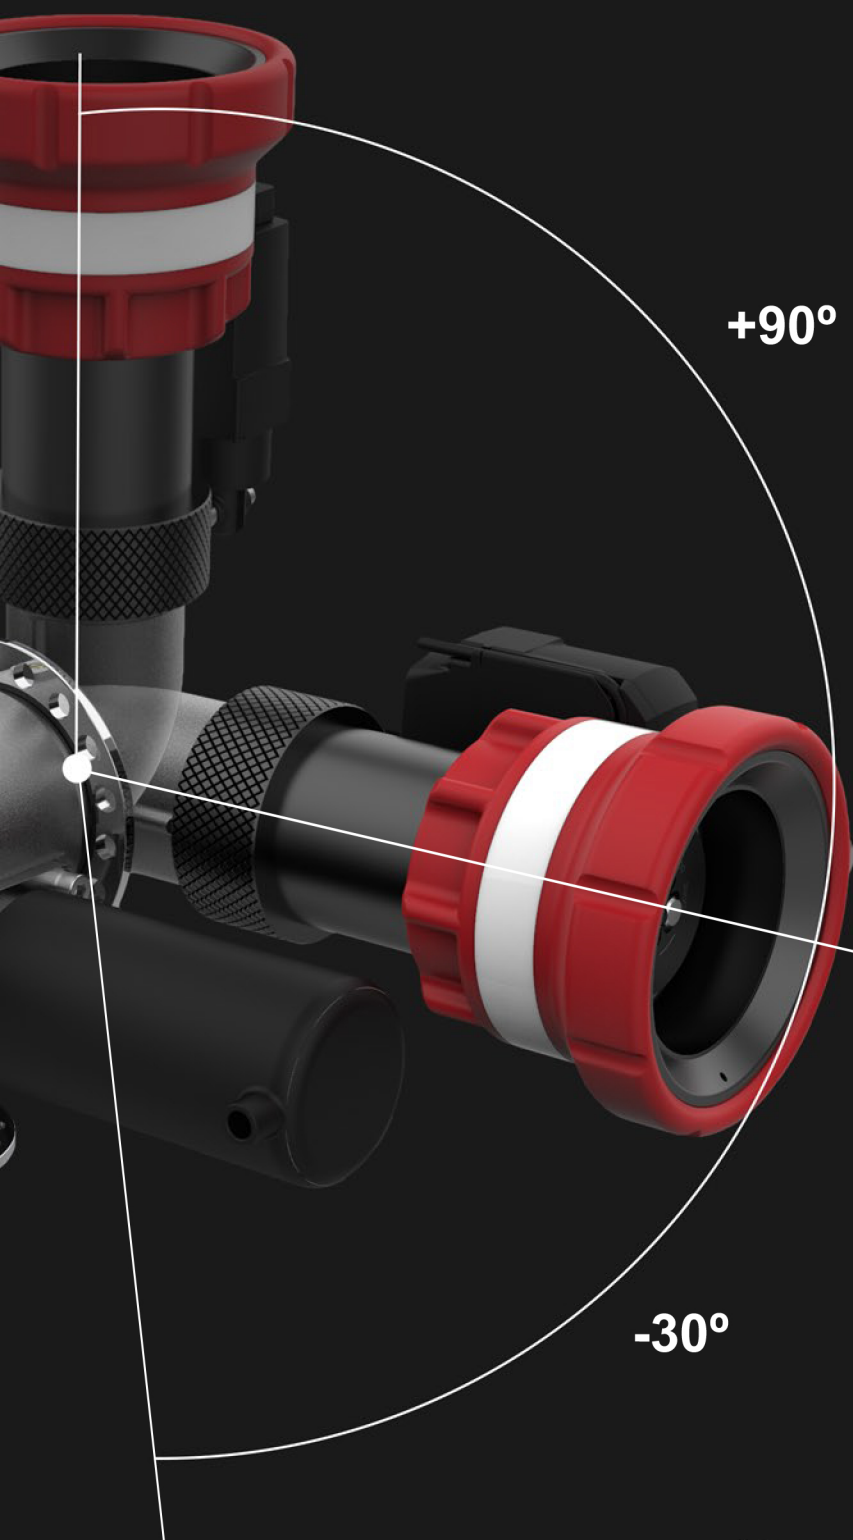

B1 FIRE
Security Systems

**Easily replaceable
battery**

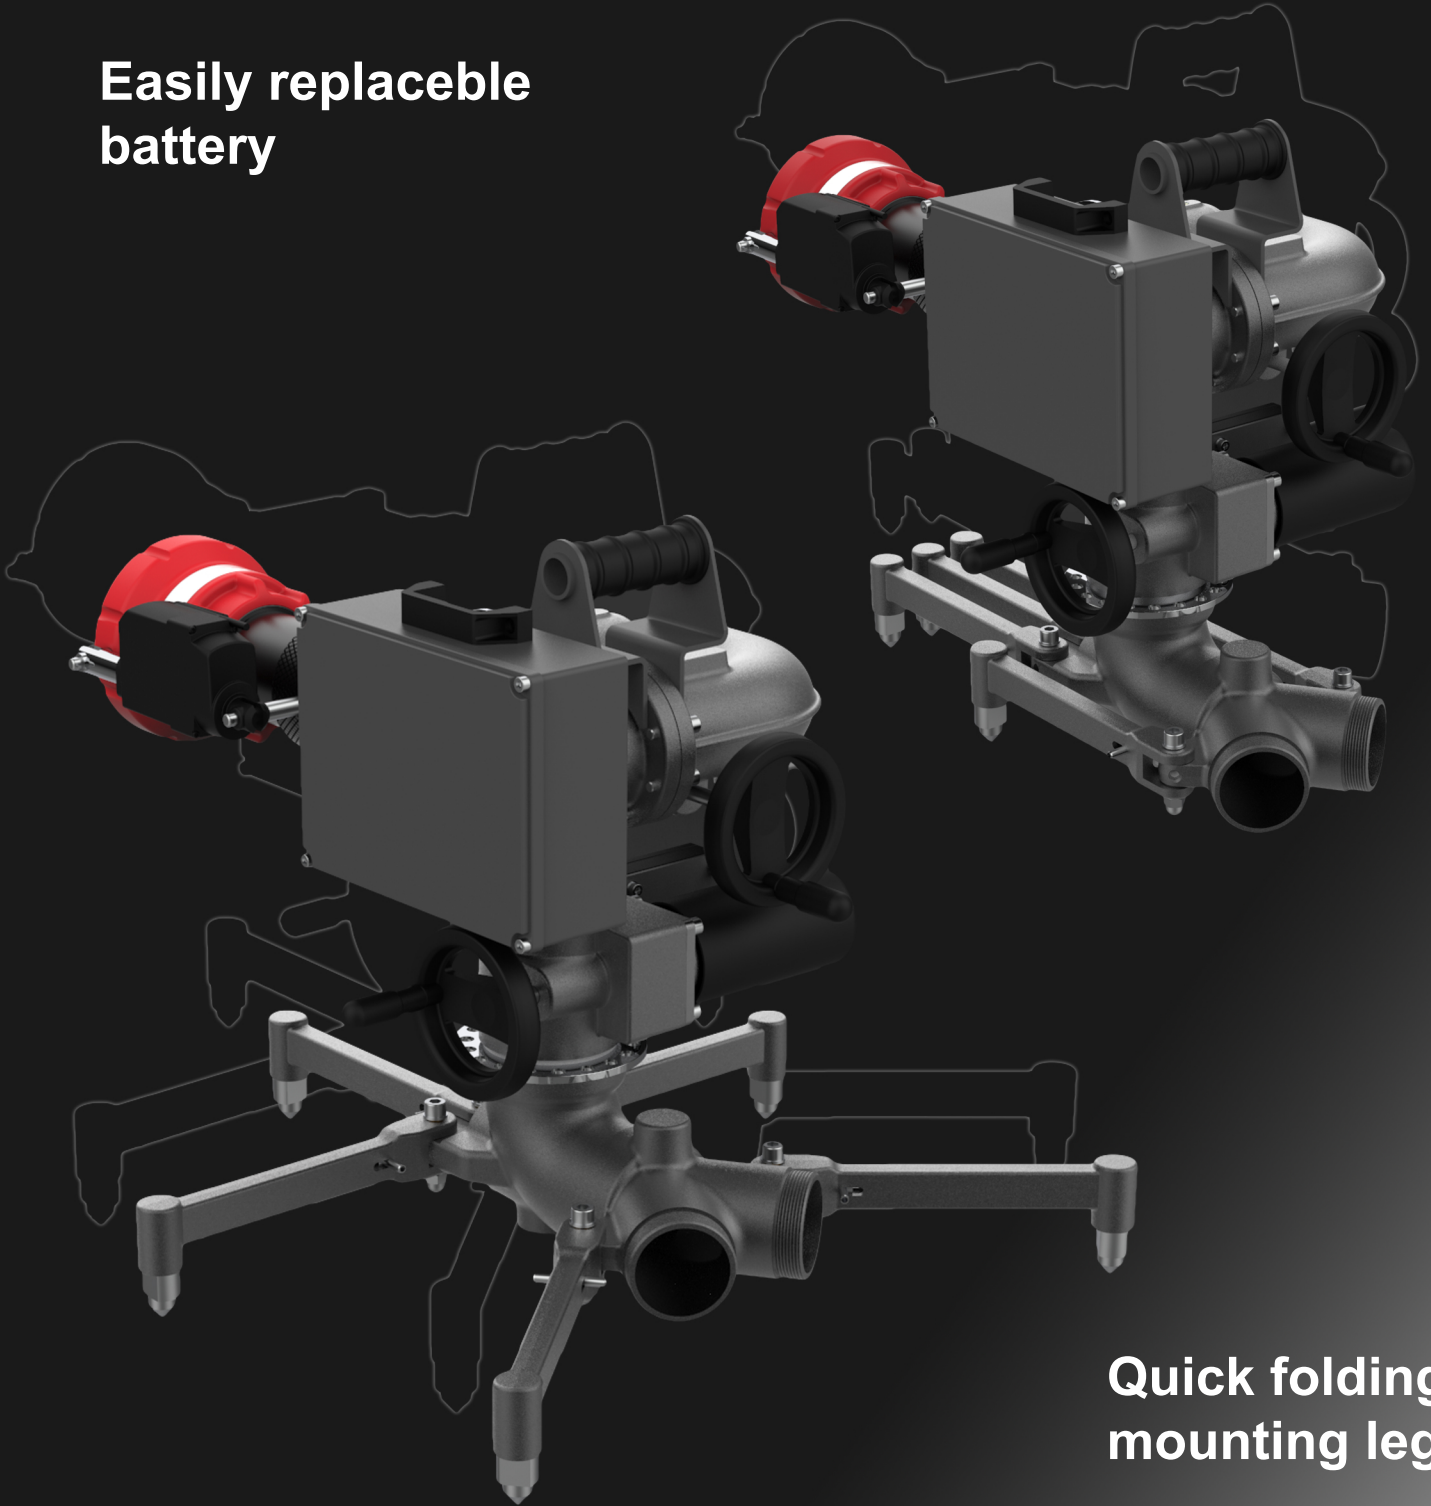

**Quick folding
mounting legs**

MONITORS - STRATUS-PB



**ABS Engine Shield
Covers**



Handwheels for emergency operations



Easily Replaceable LiFePO4 Battery Box



**Optional remote controller for
outside operation up to 300 meter**

MONITORS - STRATUS-PB



Description



Our STRATUS-PB monitor is a compact, portable and chargeable monitor with remote control. Can be used for various environment especially in industrial zones and hazardous areas. The flow rate can go up to 3,500 lpm at 7 bar at the monitor's outlet. Vertical range is from -30° to +90°, horizontal range 360° by electric motors. It can be equipped with different outlet equipment or couplings. Discharge time up to 5 hours and battery can be replaceable easily for continuous operations.

Technical Specifications

Drive	Electric motors 24V (Optional handwheels for emergency operations)
Max. Flow Rate	3500 lpm @7bar nozzle pressure
Max. Pressure	16 bar
Inlet	2 x 2½" NPT, 2 x 2½" BSPT, DN 80 Flange
Outlet	2½" NPT, 2½" BSPT
Vertical Range	-30° to +90° (170°)
Horizontal Range	360° max. (Can be set by security bolts)
Nozzle Type	Manual adjustable flow (1000-3500 lpm) straight jet/stream and wide angle fog
Material/Finish	Aluminum / Hard Anodized

Options

Foam Barrel	Standard flat head, blabbermouth
Camera	Standard, thermal vision
Controller	Joystick, remote control
Position Indicator	Rotary switch, absolute encoder
Projector	Long range, close range or both

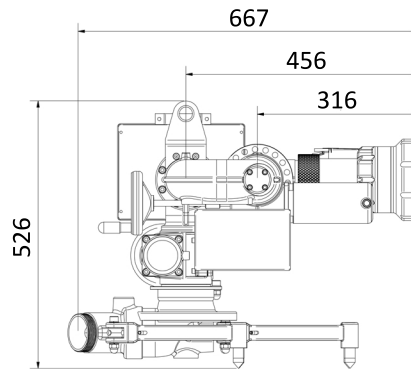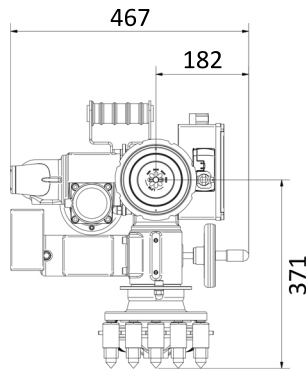

Contact

All dimensions are in mm.